

A1 Microwave

Web: <http://www.A1Microwave.com>

Email: A1sales@A1Microwave.com




A1 Microwave is a leading designer and manufacturer of filters, diplexers, power combiners, couplers and adaptors for satcoms, telecoms, radar, medical and scientific applications.

A1 Microwave also provides standard and custom waveguide components and assemblies including : straights, bends, twists and flexibles.

A1 Microwave is ITAR free and provides a **Fast delivery and No NRE** (on standard designs) by using sophisticated in-house design and simulation software, all new **designs are "right first time"** allowing the design to move from the design computer to the machine shop without the need for prototyping. **Stock filters available for immediate despatch.**

A1 Microwave has full in house CNC machining, turning, brazing, hard and soft soldering and bending facilities.

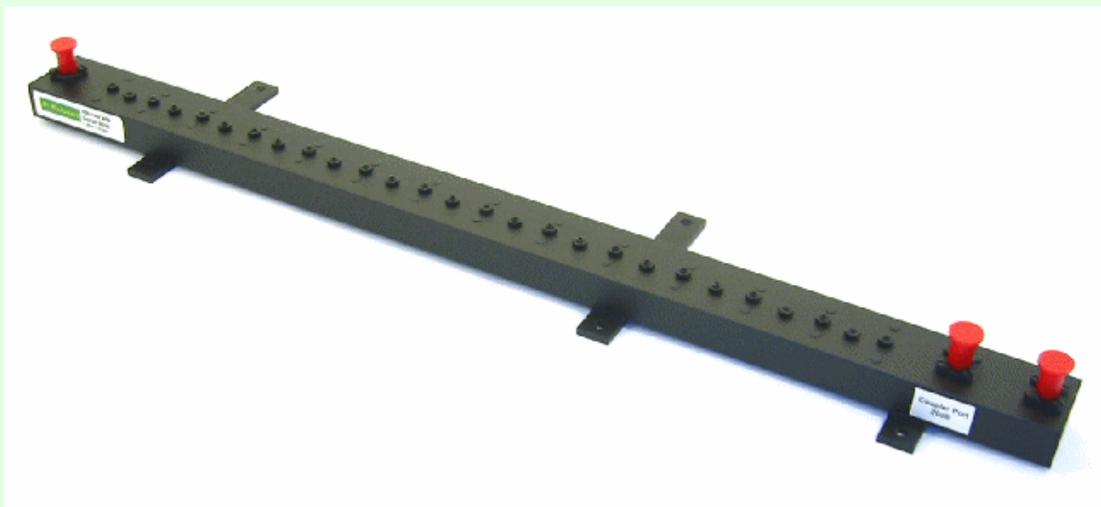

Ordering information :- Model number **PB1144WB** X-band Satcom Receive Filter

Designed for X band satcoms applications for protecting LNA / LNB receivers from radar interference

Passband		7.25 to 7.75 GHz
Passband insertion loss		0.6 dB typical
Passband return loss		20 dB min
Passband group delay variation		5.7 ns typical
Coupled port		-20 dB nominal
Rejection:	from DC to 7.05 GHz	85 dB min
	from 7.9 to 8.4 GHz	55 dB min
Overall length		440 mm nominal
Connectors		SMA female (alternative flanges and coax interfaces available)

